

VG

✓ LOW-NOISE OPERATION

✓ LOW ENERGY CONSUMPTION

✓ RELIABILITY

✓ EASY HANDLING

APPLICATION

VG are compact submersible well pumps with a diameter of 3" and 3.5", which are perfect for wells with a small diameter. Thanks to their solid construction and high efficiency, they ensure stable and effective water pumping.

VG submersible well pumps are intended for supplying groundwater in household installations, small water supply networks, in agriculture and horticulture, as well as for emptying tanks.

✓ Discharge port made of stainless steel

✓ Built-in check valve and capacitor

✓ Corrosion and sand resistance

✓ Overload protection

RANGE OF USE

Diameter pump	from 3" to 3,5"
Flow	up to 3 m ³ /h
Head	up to 145 m
Cable length	20 m
Liquid temperature	up to 35°C


DESIGNATION KEY

	Diameter pump ["]	Number of rotors
VG 3,0 / 1 / 15		
Pump type	Nominal flow [m ³ /h]	



DIMENSIONS AND RANGE OF USE

VG

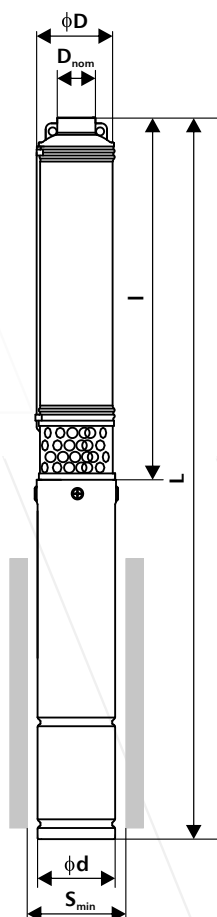

Pump type	Dimensions [mm]						Weight [kg]	Number of rotors	Engine power [kW]
	D_{nom}	L	I	D	d	S_{min}			
VG 3,0/1/15	1"	970	568	76	72	86	9,8	15	0,37
VG 3,0/1/20	1"	1133	681	76	72	86	11,8	20	0,55
VG 3,0/1/27	1"	1352	870	76	72	86	13,6	27	0,75
VG 3,0/1/37	1"	1668	1126	76	72	86	17	37	1,1
VG 3,0/3/16	1 1/4"	1255	771	76	73	86	12,6	16	0,75
VG 3,0/3/20	1 1/4"	1450	906	76	73	86	15,2	20	1,1
VG 3,0/3/24	1 1/4"	1617	1073	76	73	86	16,2	24	1,1
VG 3,0/3/28	1 1/4"	1813	1209	76	73	86	17,8	28	1,5
VG 3,5/2/14	1 1/2"	986	598	88	85	98	14	14	1,1
VG 3,5/3/11	1 1/4"	1255	517	88	85	98	12,6	11	0,8
VG 3,5/3/15	1 1/4"	1450	695	88	85	98	15,2	15	1,1
VG 3,5/3/18	1 1/4"	1617	811	88	85	98	19,4	18	1,5

